

SCV-202.2H82L


Variable Type Vacuum Capacitor (VH82L Type)

Specification

Peak Test Voltage	20 kV, peak (at 50,60 Hz/ 1 minute)
RF Working Voltage	12 kV, peak (at 13.56 MHz)
Capacitance nominal	12 – 220 pF
Linear Variability	26.3±1.4 pF/Turn ($C \geq 50\text{pF}$)
Maximum Current (Convection)	135 A, rms (at 13.56 MHz)
Tuner Turns	10.5±0.5 Turns
Tuner Operating Torque	18 N · cm
Total Length	125 mm
Mounting Length	95 mm
Outer Diameter	φ82 mm
Weight	1.6 kg







Drawing

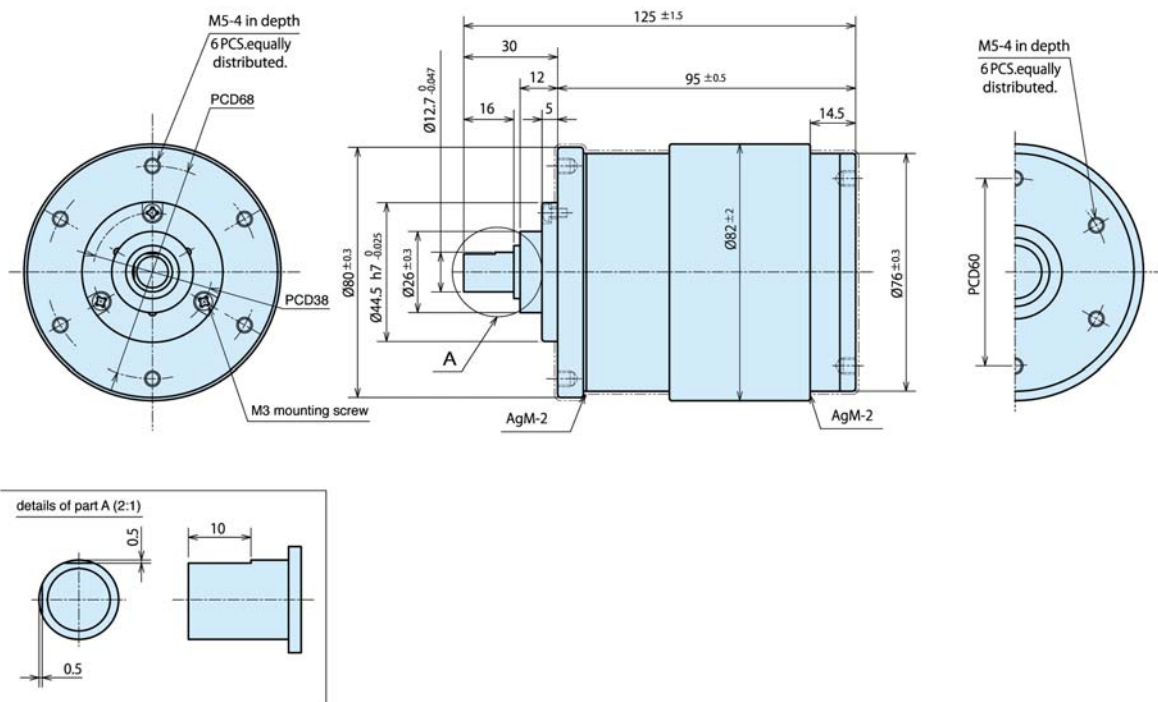

SCV-202.2H82L

Variable Type Vacuum Capacitor (VH82L Type)

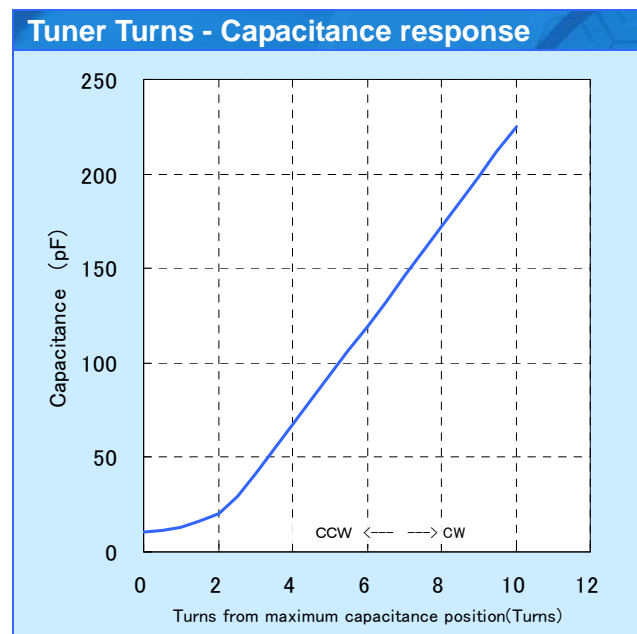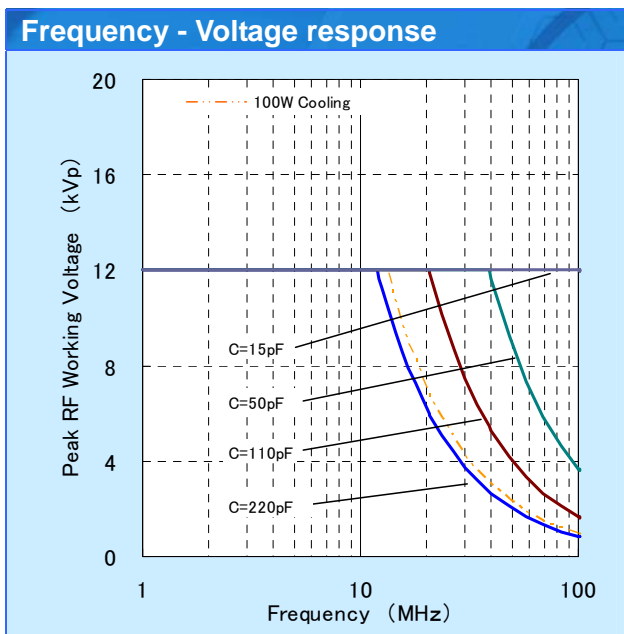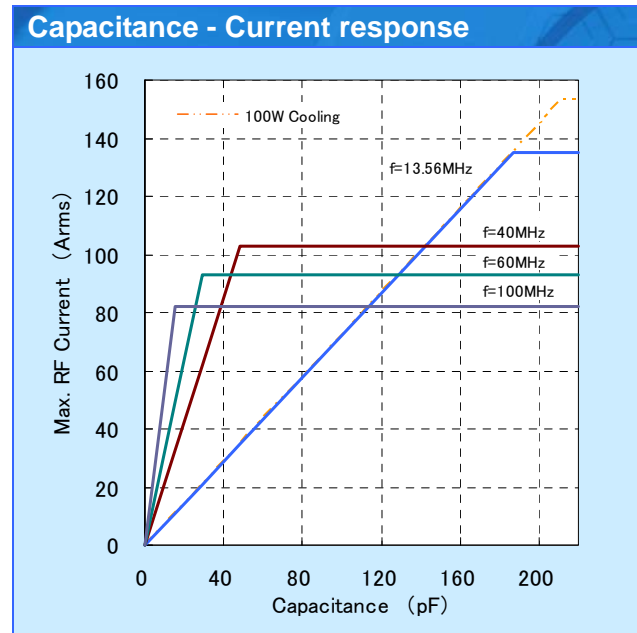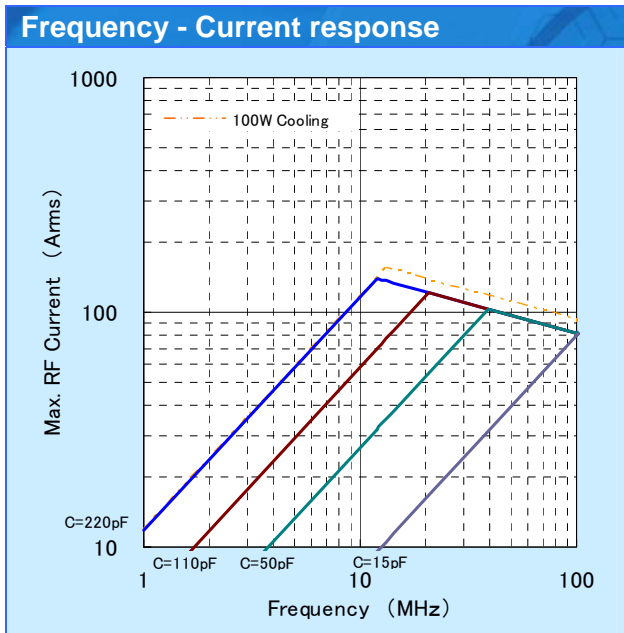

Notice:

- Current collecting system: Capacitor both-end full-face collection.
- Cooling System: Convection.
- Permissible surface temperature: 125°C.
(The surface temperature changes with current collecting conditions and ambient temperature.)
- Ambient temperature: 25°C.